

Universal Module (230 V) to monitor up to 6 non-motorized fire dampers (end limit switches). 6 digital inputs and 2 digital outputs. It is the perfect solution for bus (Modbus and BACnet) integration into a superior system or in combination with the M30, M240 controllers of SMT.

- **New flexibility:** Universal System Link between non-motorized fire dampers and any Modbus or BACnet system or the systems from SMT. One bus address enables individual monitoring of the 6 end limit switches
- **Price attractive:** With the FSC-UFC230-NM-6, there is no need for complex wiring of each end limit switch into the control cabinet! Up to 6 end limit switches can be monitored with one device
- **Easy installation:** The FSC-UFC230-NM-6 is delivered in a ready-to-install housing. It can therefore be installed locally near the fire dampers. Thanks to the innovative mounting bracket, the FSC-UFC230-NM-6 can simply be snapped onto the bracket at any time during the project (in the factory, on site)
- **Simplified maintenance and visualization:** In connection with the M30 and M240 controllers from SMT, the status of all connected, non-motorized fire dampers can be seen at a glance. In addition, each end limit switch can be checked individually via the M30 / M240 controller! The logging and documentation of the positions / states of the inputs is available as standard. The log file can be sent via email (free cloud access)
- **Additional features as standard:** Automatic baud rate detection (with BACnet)
- **Easy selection of the bus protocols:** BACnet and Modbus (selectable via dip switch)



## Technical Data

Nominal Voltage	230 V AC
Nominal Voltage Range	-20%... + 20%
Dimensioning	2 VA
Power Consumption	2 W
Connections	6 quick connections for digital inputs 2 quick connections for digital output
Communication	Modbus RTU (RS-485) or BACnet MS/TP (RS-485)
Protection Degree	IP42, housing of non-flammable polycarbonate
Certified	TÜV, CE

For more details see Technical Data Sheet

## Application

The UFC230-NM-6 is used to monitor up to 6 non-motorized fire dampers and to activate up to 2 digital outputs (e.g. alarm signals, fire doors). It provides Modbus or BACnet connection, is available in an easy to install housing and mounted at or close to the dampers. With the UFC230-NM-6 the wiring of each end limit switch to the cabinet is no longer necessary! The control modes Modbus or BACnet can be chosen through the dip switch terminal.


## Inputs

Connections for 6 digital inputs (DI)

## Outputs


Connections for 2 digital outputs (DO)

## Direct Integration

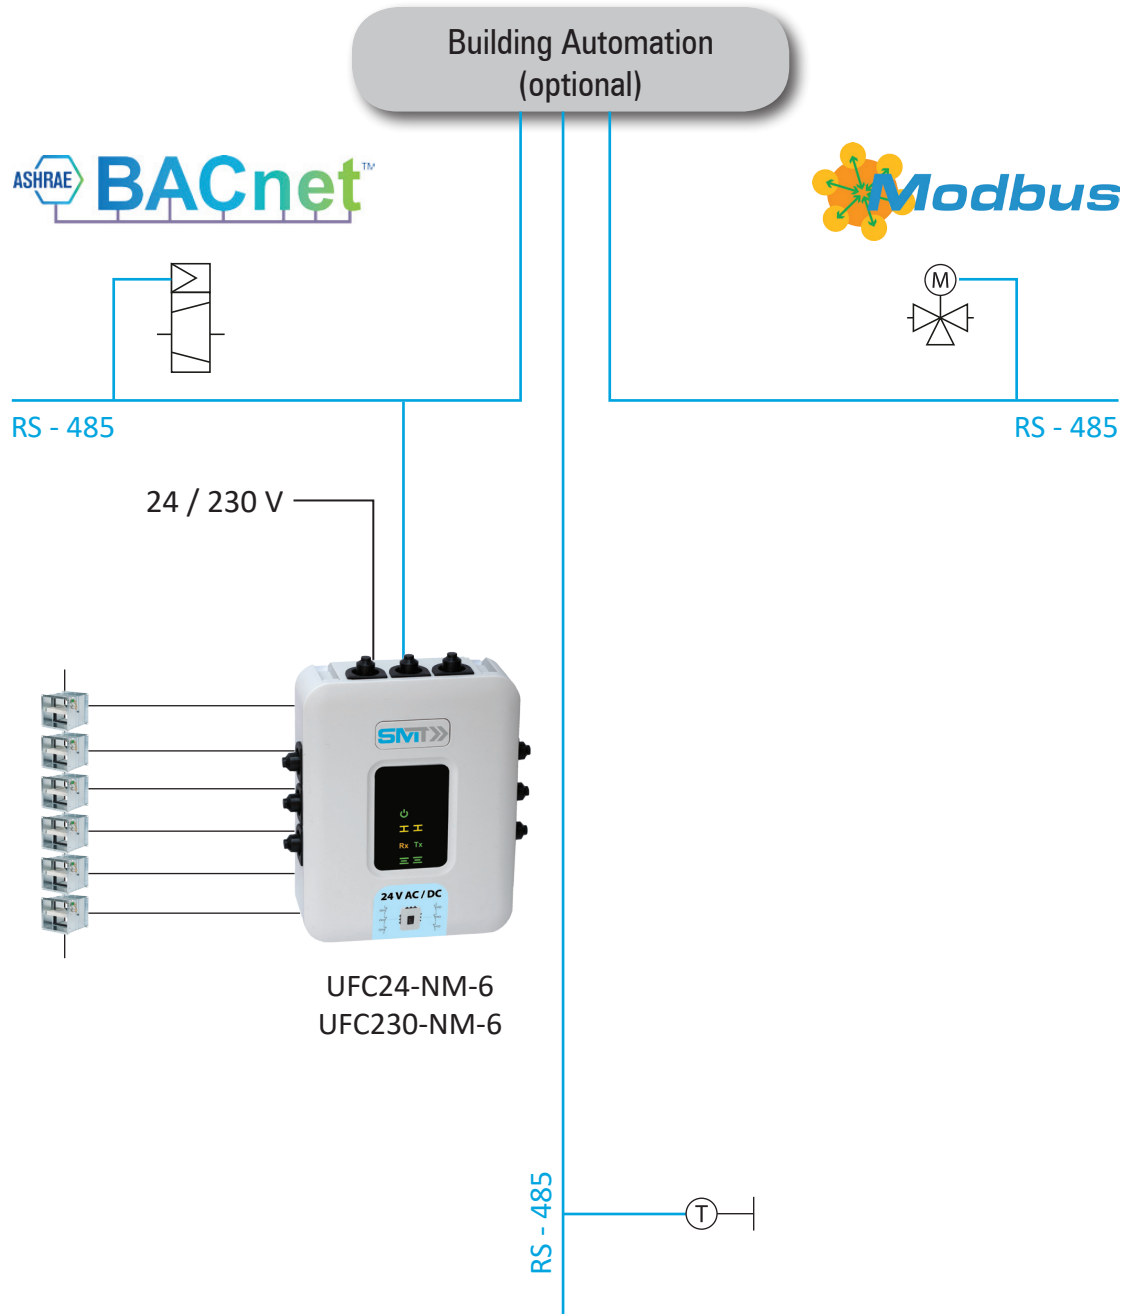


- Upon request, SMT supplies the functional profile of the UFC devices for the easy integration into any Modbus or BACnet controller

## Universal System M30

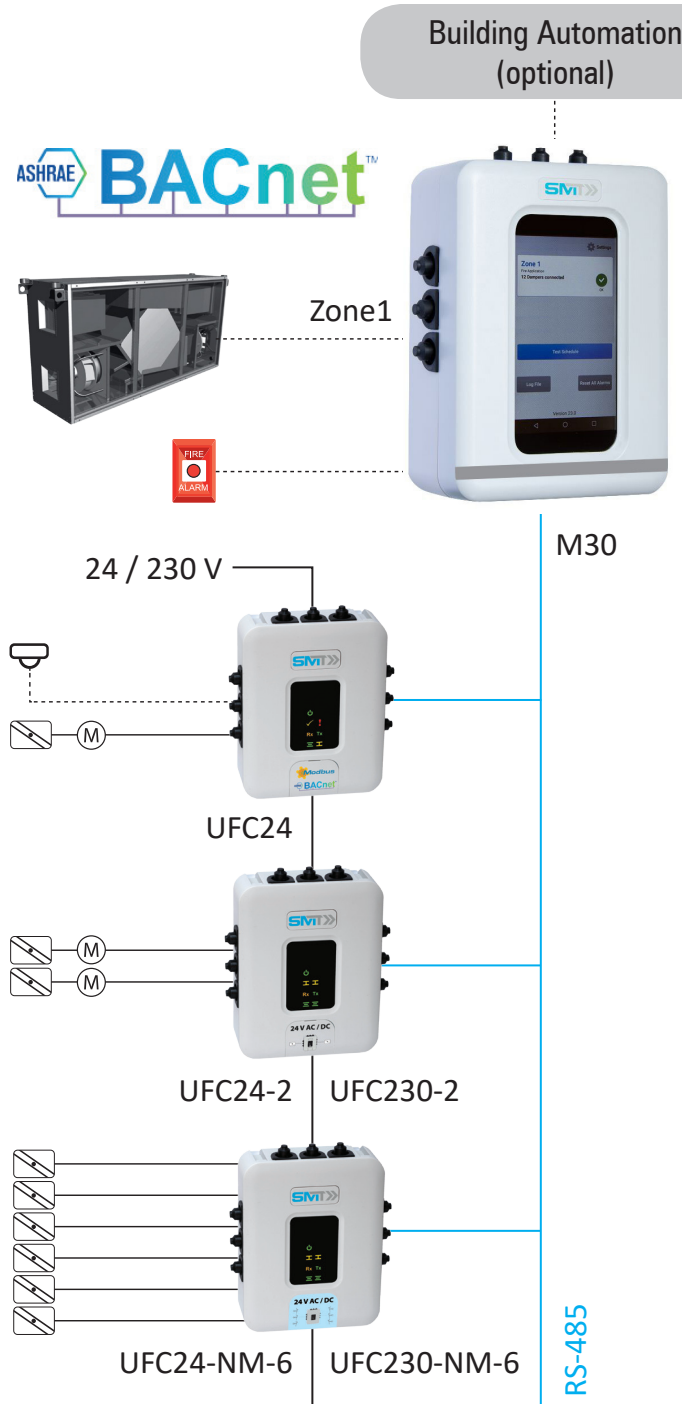


- Individual control of 2 dampers together with the UFC24-2 / UFC230-2
- UFC devices are available for the connection of 24 V and 230 V actuators (24 V: UFC24, UFC24-2; 230 V: UFC24-230, UFC230-2)
- UFC devices are available for non-motorized fire dampers / for up to 6 end limit switches (24 V: UFC24-NM-6; 230 V: UFC230-NM-6)

## System M30-NM

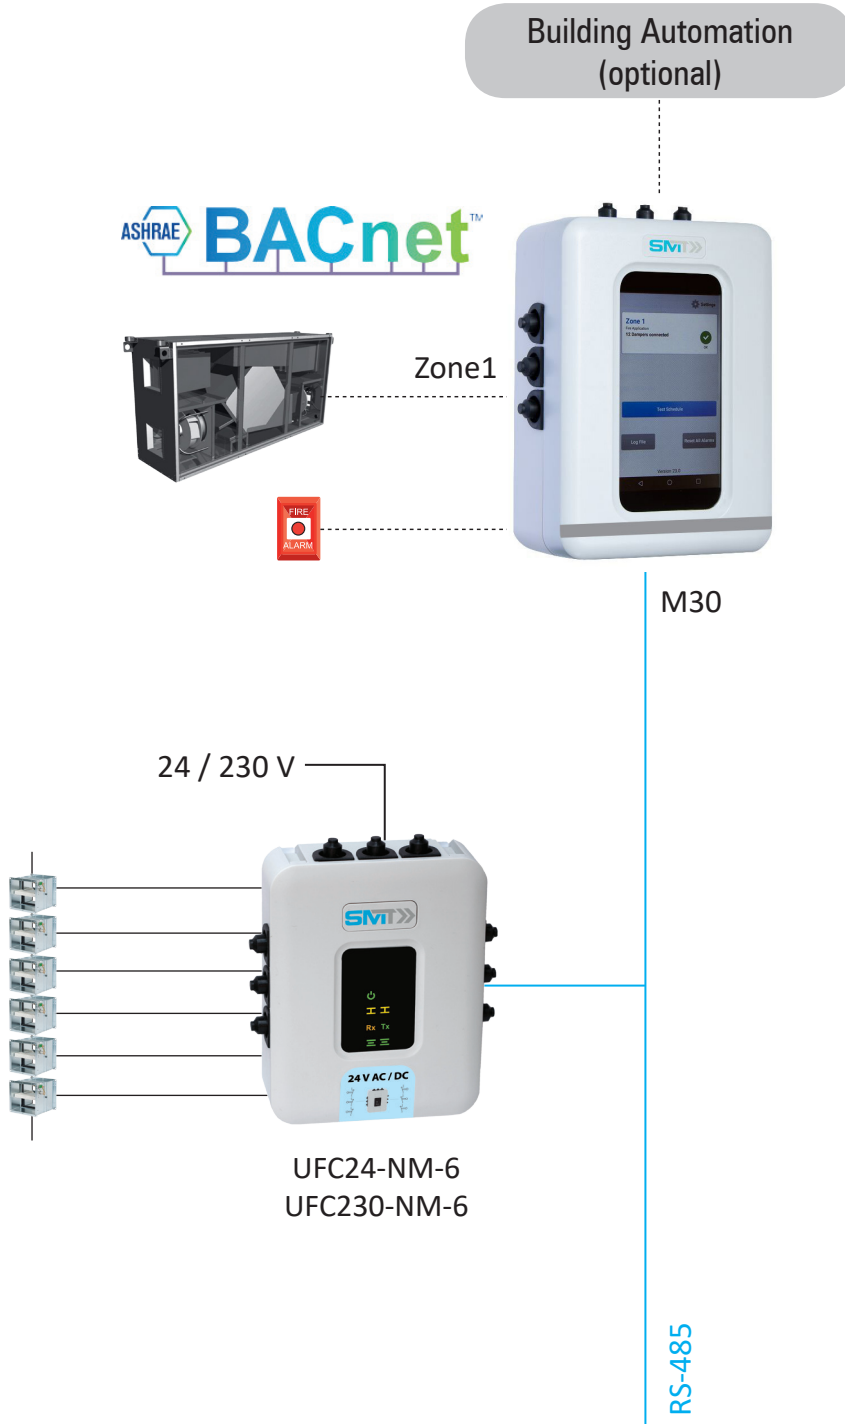

## Universal System M240

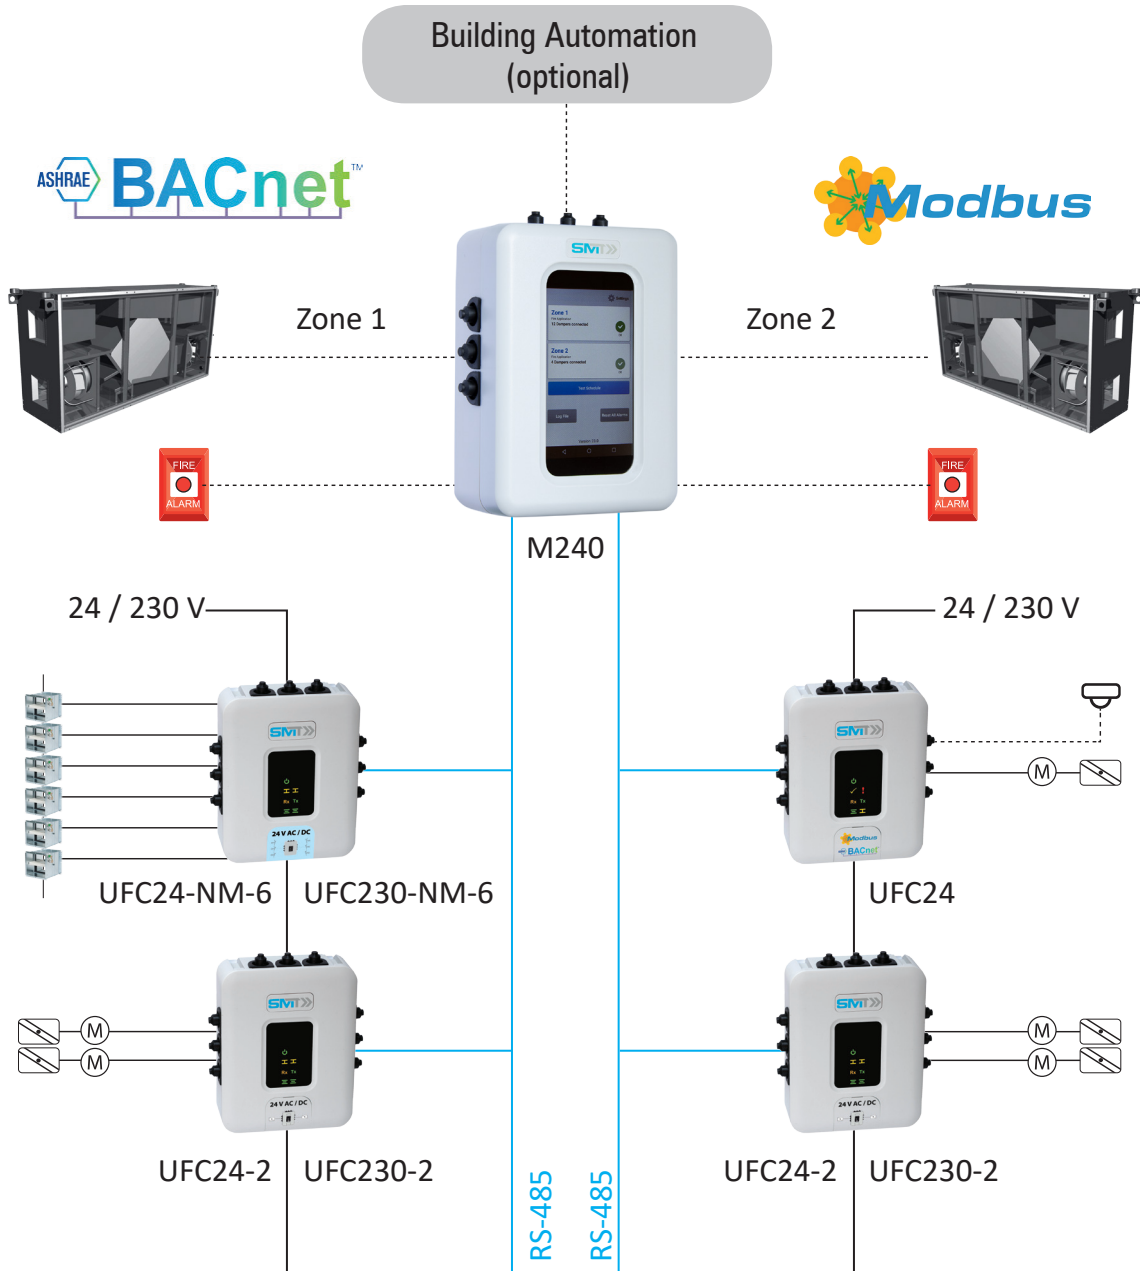

- Upon request, SMT supplies the functional profile of the UFC devices for the easy integration into any Modbus or BACnet controller
- Individual control of 2 dampers together with the UFC24-2 / UFC230-2
- UFC devices are available for the connection of 24 V and 230 V actuators (24 V: UFC24, UFC24-2; 230 V: UFC24-230, UFC230-2)
- UFC devices are available for non-motorized fire dampers / for up to 6 end limit switches (24 V: FSC-UFC230-NM-6; 230 V: UFC230-NM-6)



Systems & Modules Technology AG  
 Bachtelstrasse 32  
 CH-8636 Wald  
 Switzerland  
 Phone: +41 55 241 10 20  
 Mail: info@smtec-ag.ch